


Making Life Easier

Complete Range of Hyundai Power Products.
Now Available All Across Pakistan.

Features

- ISO 9001 Certified Manufacturing By OEM
- Warranty: 18 Months or 1000 hours.
- Low Fuel Shutdown Safety
- 24/7 After Sales Support
- 4 Cycle, Water Cooled, Natural / Turbocharged
- Direct Injection
- Mechanical / Electronic Governor System
- 12 Volt Self-Starter and Charger Alternator
- Economical & Easy availability of spares.
- Advance Digital Control System
- Long Service Life
- Low Fuel Consumption
- Optional ATS & Remote control
- Anti Vibrating Isolators

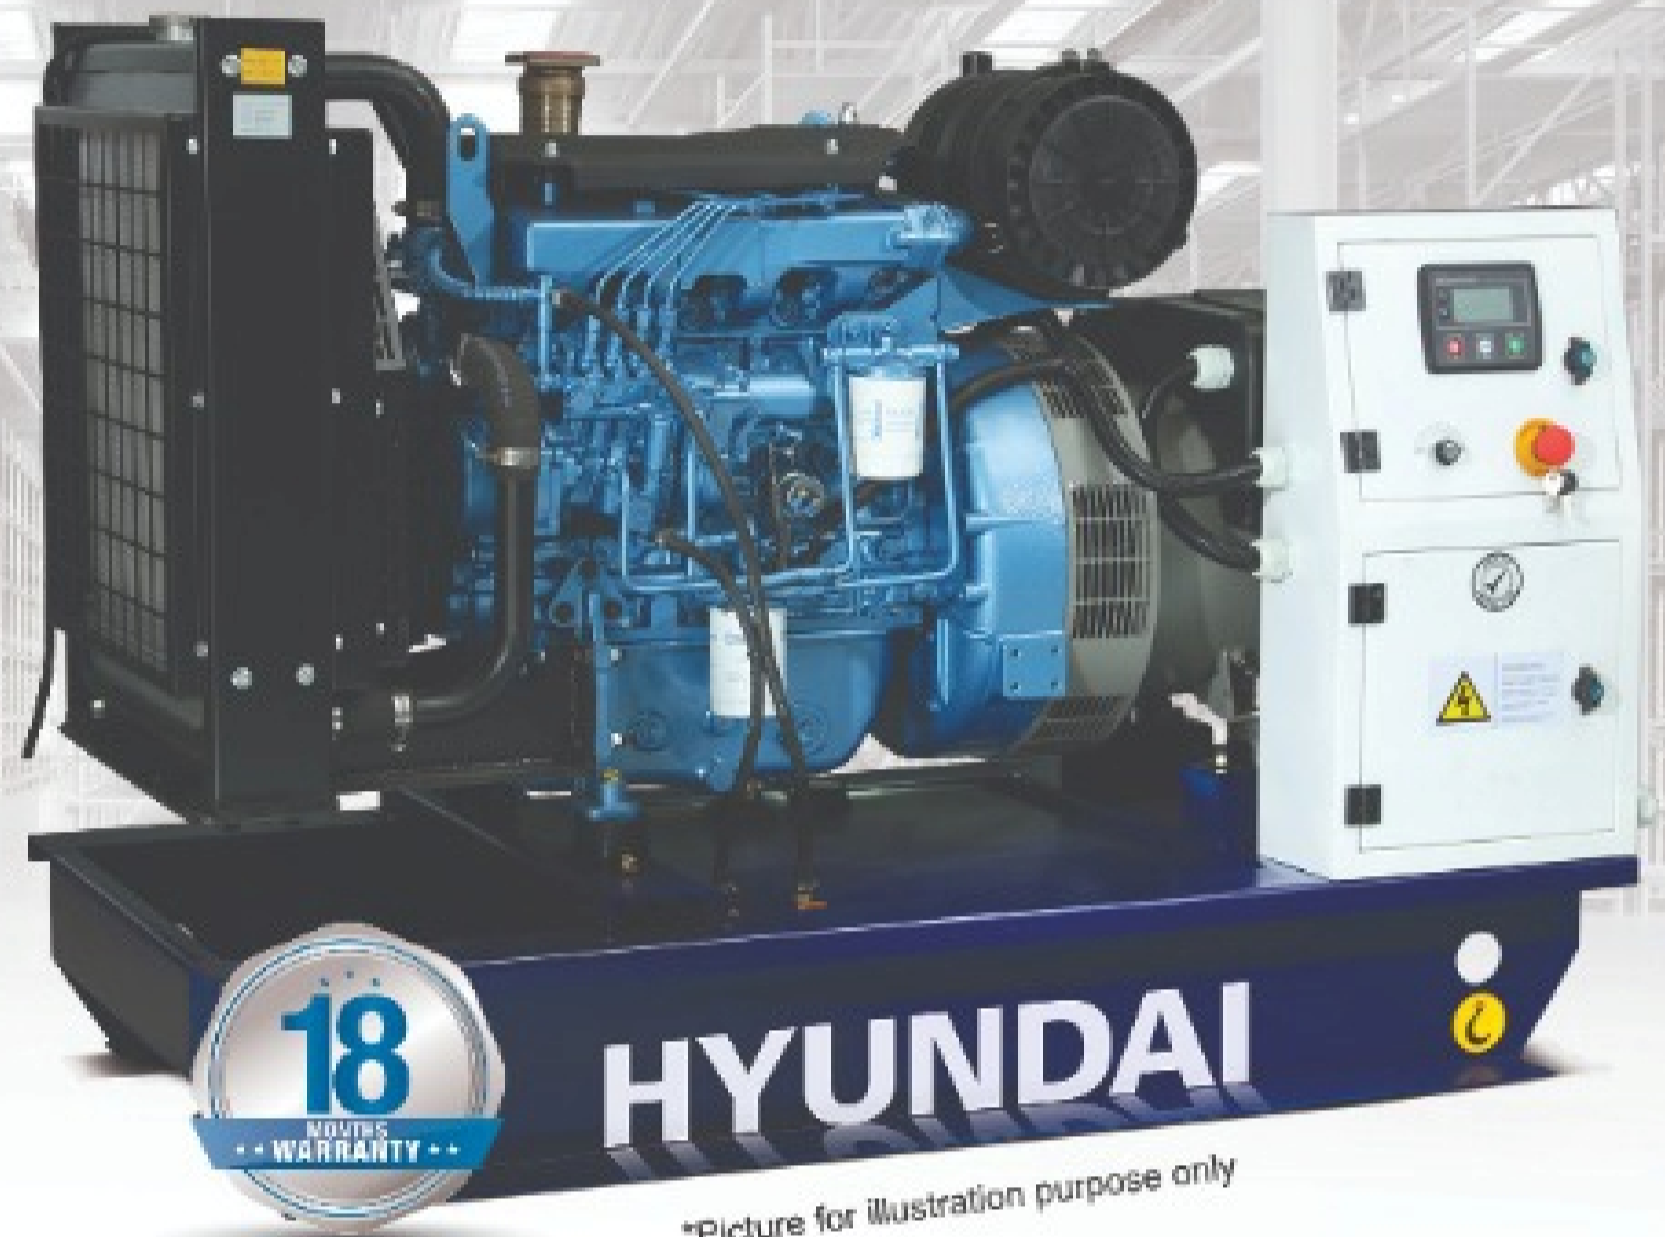

Benefits

- Safe; Eco friendly
- Long service life, Economical
- Smart; Occupies little space
- Practical design; Easy to operate
- People oriented, Safety foremost
- High standard quality guaranteed

Single/Three Phase 50Hz, 1500RPM, PF: 1/ .8				Engine(1500/rpm)				Control Module (Deep Sea)	Dimensions (inch) L*w*h
Genset Model	Phase	Prime Power KVA/ KW	Stand By Power KVA/ KW	Engine Model	Cylinder	Control	Consumption 80% L/H		
HDG10	SP	10/10	11/11	80HDE4/3	4L	E	2.12	4530	57" x 23.5" x 45"
HDG12	TP	12/10	13.2/10.56	80HDE4/3	4L	E	2.12	4520	57" x 23.5" x 45"
HDG13	SP	13/13	14.3/14.3	80HDE4	4L	E	2.8	4530	58" x 23.5" x 45"
HDG15	TP	15/12	16.5/13.2	80HDE4	4L	E	2.8	4520	57" x 23.5" x 45"
HDG18	SP	18/18	19.8/19.8	90HDE4	4L	E	3.49	4530	59" x 23.5" x 45"
HDG22	TP	22/18	24.2/19.36	90HDE4	4L	E	3.49	4520	59" x 23.5" x 46"
HDG24	SP	24/24	26.4/26.4	100HDE4	4L	E	4.56	4530	72" x 23.5" x 47"
HDG30	TP	30/24	33/26.4	100HDE4	4L	E	4.56	4520	72" x 23.5" x 47"
HDG40	TP	40/32	44/35.2	4JBT1	4L	E	5.69	4520	72" x 23.5" x 47"
HDG50	TP	50/40	55/44	4HDE100	4L	E	7.27	4520	78" x 28.5" x 51"
HDG70	TP	70/56	77/61	4HDETG100	4L	E	10.57	4520	81" x 28.5" x 51"
HDG100	TP	100/80	110/88	6HDETG2100	6L	E	15.34	6020	97" x 28.5" x 60"
HDG125	TP	125/100	137.5/110	6HDETAG100	6L	E	20.52	6020	102" x 28.5" x 58"

Alternator: Brushless, Self Synchronous, Insulation Class H, 4 Pole.

Stand by Power: Continuous running at variable load for duration of an emergency, No overload is permitted on this ratings.

Prime Power: Continuous running at variable load for unlimited periods with 10% overload 1 hour in any 12 hour period.

*Manufacturer reserves the right to make changes in model, technical specifications, color, equipment and accessories without prior notice.